

HANDSTRICH

EMBODIMENT OF OLD VALUES.
ENVIRONMENTALLY SOUND,
HIGH-TECHNOLOGY EXTRUSION.



ströher[®]
Clinker. Ceramics. Competence.

HANDSTRICH

25 Frost resistance
25 years guarantee*




HAND FORMED EDGE. WATER-STRUCK SURFACE. BUT GREEN TECH.

FIRINGS AND FORMATS




390 champagnersalz
Δ < 3 % · DIN EN 14411, Gr. A₁

DF

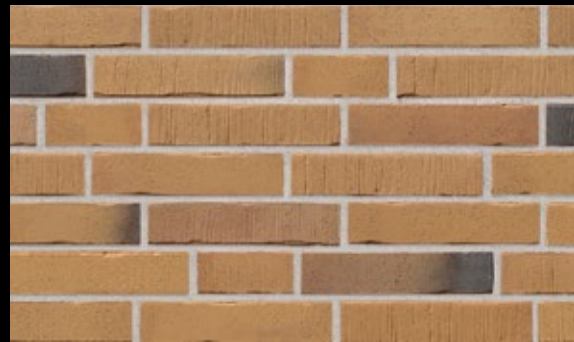

391 ockererz
Δ < 3 % · DIN EN 14411, Gr. A₁

DF

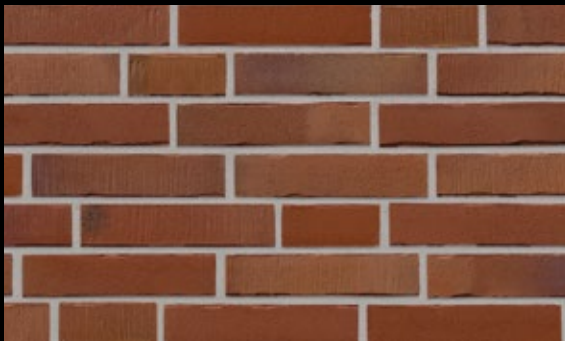

392 rotrost
Δ < 3 % · DIN EN 14411, Gr. A₁

DF



393 eisenasche
Δ < 3 % · DIN EN 14411, Gr. A₁

DF



394 schwärzkreide
Δ < 6 % · DIN EN 14411, Gr. A₁ - Part 1

DF

HANDSTRICH



**THE EDGES ARE HAND FORMED. THE SURFACE IS WATER-STRUCK.
THE APPLICATION IS COSMOPOLITAN.**

Clinker brick slips are moving away from their northern niche and experiencing an international renaissance. Handstrich unites the current spirit of sustainability with the original features of traditional clinker bricks.

As it is only possible to make hand formed edges and water-struck surfaces that are frost resistant and easy to lay and use, in combination with thermal insulation systems, by using extruded clinker brick slips sintered in a furnace at 1.300 °C. Without treatment for water-repellency. Without impregnation. And without wasteful cutting of a full brick. Simply Green Tech and cosmopolitan.



The figure shows architectural fitting based on the Handstick series.

EMBODIMENT OF OLD VALUES.
ENVIRONMENTALLY SOUND,
HIGH-TECHNOLOGY EXTRUSION.

HANDSTRICH

25 Frost resistance
25 years guarantee*



HAND FORMED EDGE. WATER-STRUCK SURFACE. BUT GREEN TECH.

PRODUCT DETAILS

HANDSTRICH

unglazed,
DIN EN 14411



format no.	7650	7651
description	clinker brick slips	corner ¹⁾
nominal size (cm)	DF	DF
production size (mm)	240 x 52 x 14	240 x 115 x 52 x 14
	★ PG 434 ●	★ PG 765 ●
pieces per bundle	18	14
pieces per m ² /rm incl. joint	64,00	16,13
pieces per pallet	2.070	910
m ² /rm per bundle	0,28	0,87
m ² /rm per pallet	32,34	56,42
bundles per pallet	115	65
kg per pallet	776	528
kg per piece	0,375	0,580
kg per m ² /rm	24,000	9,355
kg per bundle	6,750	8,120
surcharge	❖	❖

- ★ = Discount on pallets.
- = Normally available ex stock.
- PG = Price group (see price list 2017).
- ❖ = Minimum quantity: each open box will incur a surcharge.

¹⁾ = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Zoé, Gravel Blend, Epos, Aera T, Aera, Roccia X, Roccia, Asar, Terra, Duro, TerioTec® X Profile, TerioTec® X, TerioTec®, Secuton®, Stalotec®, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.



Completely frost-resistant
*25 year guarantee

Tunnel kiln fired

Suitable for
insulation systems

Weatherproof

Economic

In compliance
with DIN EN

Fade-free and
colourfast

Easy maintenance
and hygienic

Ecofriendly

Resistant to
chemicals

Glow-resistant
and fireproof

Anti-static

HOW TO APPLY CLINKER BRICK SLIPS CORRECTLY TO A FACADE

PREPARATION: Before applying the slips, the visible dimensions of the window and door lintels need to be worked out. It is rare that the reveal and lintel measurements correspond to the standard brick slip sizes. This is why the joints between the brick slips need to be adjusted. The overview dimensions calculated are then also transferred to the outside corners.

PROCEDURE: After working out the heights at the corners of the walls, the angles at the outer corners are applied using the floating-buttering method. "Floating" describes the application of the adhesive using a notched trowel in medium-bed adhesive. "Buttering" means coating the back of the brick slip with adhesive using a spatula or trowel. Before the surface is worked, the connections between stretches of masonry first need to be determined. In most cases, 'disordered' joining is recommended in which five head ends per square metre are included. The head visually forms the front end of an entire brick and in the case of clinker slips is cut from the surface using a tile cutter or a radial cutter.

JOINTING: After applying the clinker slips and after a corresponding drying time (see the adhesive manufacturer's instructions), a start can be made on grouting. Clinker slips with smooth surfaces can be processed by the slurry method. There are a number of grouts on the market but some have plastic and pigment additives. For this reason, you should always consult the mortar manufacturer regarding suitability before choosing the grout. All rough, patinated and textured surfaces are grouted with a conventional pointing trowel and a metal float.



Window lintel perfectly replicated with angles.



The corner angles are worked using the floating-buttering method.



Use a string to plumb the clinker area. The clinker slips are pressed into the adhesive bed.



The finished surface. Grouting can be done after the appropriate drying time.



Grouting using pointing trowel and metal float along the horizontal.



The vertical joints can be finished more easily with a smaller pointing trowel.



Jointing with a trowel allows you to create different looks.



Sweeping out the joint gives it a corresponding structure.



The finished joint pattern. Full masonry stretches are grouted at one go.

CONVENTIONAL GROUTING WITH POINTING TROWEL

The following Ströher series must be grouted by conventional methods: BRICKWERK, BRICK 60, WASSERBRAND, STILTREU, KONTUR, RIEGEL 50, GLANZSTÜCKE, HAND-STRICH, STEINLINGE, ZEITLOS, KERAPROTECT®

GROUTING USING THE SLURRY METHOD

The following Ströher series can be grouted with the slurry method: KERAVETTE®, KERABIG®

ströher
Clinker. Ceramics. Competence.